


Hydraulic Broaching Machine

正陽立式拉床

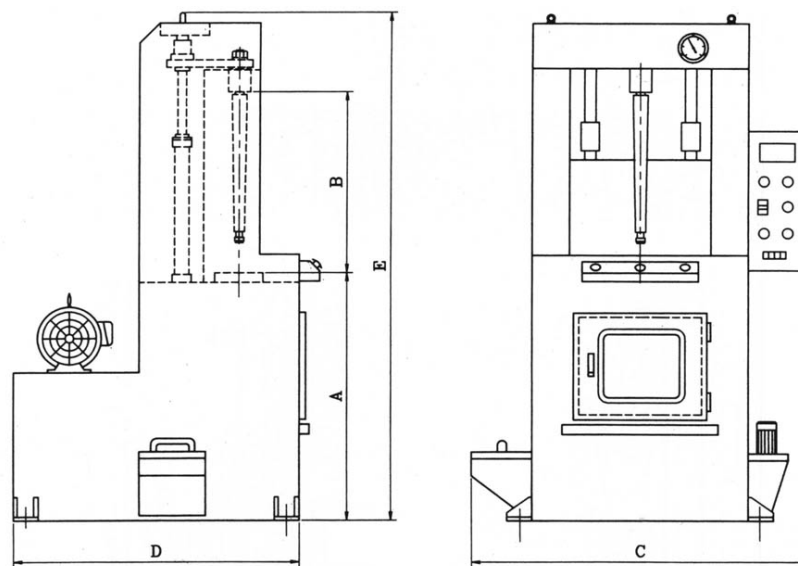

型式 / Model		VB-2T	VB-3T	VB-5T	VB-7.5T	VB-10T	VB-15T
最大拉削力 / Max. working force		2 Tons	3 Tons	5 Tons	7.5 Tons	10 Tons	15 Tons
拉削行程 / Pulling stroke		600 mm	600 mm	800 mm	800 mm	800 mm	1000 mm
最大拉削速度(可調) Max. Pulling speed (variable)	60Hz	6.3 M/Min	6.7 M/Min	5.4 M/Min	5.7 M/Min	7.0 M/Min	5.7 M/Min
	50Hz	5.3 M/Min	5.6 M/Min	4.5 M/Min	4.8 M/Min	5.8 M/Min	4.8 M/Min
回昇速度 Return speed	60Hz	12.7 M/Min	13.8 M/Min	10.6 M/Min	11.3 M/Min	14.1 M/Min	11.6 M/Min
	50Hz	10.5 M/Min	11.5 M/Min	8.8 M/Min	9.4 M/Min	11.8 M/Min	9.6 M/Min
加工物最大外徑 / Max. outer dia. Of working		150 mm	200 mm	250 mm	250 mm	300 mm	350 mm
工作台高度 / Height of working table	(A)	1050 mm	1050 mm	1250 mm	1250 mm	1300 mm	1500 mm
作業最大開度 / Max. daylight of operation	(B)	700 mm	700 mm	900 mm	900 mm	950 mm	1200 mm
機械總高 / Overall machine height	(E)	2100 mm	2100 mm	2500 mm	2500 mm	2700 mm	3300 mm
主電動機 / Main Drive Motor		3 HP	5 HP	7.5 HP	10 HP	15 HP	20 HP
佔地面積 / Floor Space	(CxD)	1200x1200mm	1200x1200mm	1300x1400mm	1300x1500mm	1400x1700mm	1600x2000mm

特殊附件 / Special optional accessory

- | | |
|----------------------------------|-------------------------------------|
| 1. 拉刀 / Broach | 5. 多軸拉削裝置 / Multi-Shaft pulling set |
| 2. 拉刀夾頭 / Broach chuck | 6. 切屑自動裝置 / Auto conveyor of chip |
| 3. 自動提刀夾頭 / Auto promotion chuck | 7. 操作人機介面 / PLC Workstation |
| 4. 夾治具 / JIG | |

SUNNY ENTERPRISE CO., LTD.

9, LANE 56, AN-KANG RD., NEI-HU DIST., TAIPEI 114
 TEL: (886)-2-27912121 (10-LINES) FAX: (886)-2-27910871
 E-mail: sunny@sunnyent.com.tw
 http://www.sunnyent.com.tw